


DARASI	: 25,8 t	DİNGİL ADET VE ÖLÇÜ	: 4X130X191
TONAJI	: 64,2 t	TEKERLEK TAKIMI	: MONOBLOK
KAPASİTE	: 85,5 m <sup>3</sup>	BUATAGRES	: RULMANLI
TABAN ALANI	: 3904 m <sup>2</sup>	CER KANCASI	: UIC 540 TİPİ
YAN KAPILAR	: 4x(1800x1800)	TAMPON	: BİLEZİK SUSTALI 32KJ.
ŞASI BOYU	: 14500 mm	OTO. KOŞUM TAKIMI	: VAR
ŞASI GENİŞLİĞİ	: 3060mm	HAVA FRENİ	: MH-GP-A
VAGON YÜKSEKLİĞİ	: 3335 mm	SABO TİPİ	: KOMPOZİT
TAMPONDAN TAMPONA	: 15740 mm	TABAN MALZ.	: SAC
BOJİ DİNGİLLER ARASI	: 1800mm	MAKS. HIZ	: 120 KM
PIVO MERKEZLERİ	: 10700 mm		
YÜKLEME BOŞALTIMA	: Vagon üstü açık		

**TSI SERTİFİKALI BİR VAGON OLAN  
EANOSS VAGONU İLE  
AVRUPA DEMİRYOLU AĞINDA DA  
TAŞIMACILIK YAPMAK MÜMKÜNDÜR.**



TRACK GAUGE	: 1435 mm
CAPACITY	: 64,7 Tons
WAGON LENGTH	: 15740 mm
RAIL TYPE	: S49
THE DISTANCE BETWEEN BOGIE AXIS	: 10700 mm
THE MINIMUM CURVE RADIUS	: 70 m
RAILCAR WIDTH	: 3000 mm
AXLE LOAD	: 22,5 Tons
BOGIE TYPE	: Y25
VEHICLE WEIGHT (empty/full)	: 25,3 / 90 Tons
WHEEL DIAMETER	: Ø 920
MAXIMUM SPEED	: 120 Km/H
BRAKE SYSTEM	: Knorr

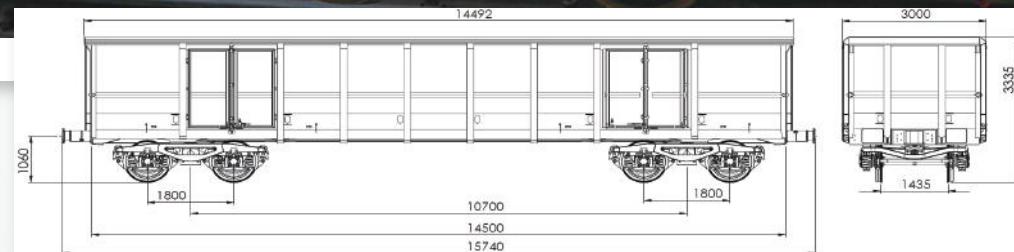

**TRANSPORTATION IS POSSIBLE  
ON EUROPEAN RAILWAY  
WITH EANOSS WAGON  
WITH TSI IS A CERTIFIED**